

# CSA-FDV Data Sheet

**Cig-Arrête Master Flame Detector with Voice Alarm Monitor (Part No CSA-FDV)**



## Description

Designed for the detection of unauthorised smoking in areas subject to high winds, rapid ventilation, smoke and gas. Typical applications include open areas, building entry/exit points, rooms with high ceilings (>3m <6m), or locations subject to intermittent smoke or vapour.

The module is designed for single applications, and will detect a 25mm cigarette lighter flame at 6 metres within 1 second. When installed as part of a Cig-Arrête Tobacco Control System, the FDV can be combined with Smoke Detection Slave units (CSA-SGA) to provide complete smoke/flame coverage.

Coverage 6m @120° FOV

**\*\*Multi-Lingual Product**

## Product Features


- Designed to detect a flame lighting a cigarette
- Fully self-contained, battery operated flame detector and voice sounder
- 120 degree field of view
- Operates from 1 x 9V standard alkaline PP3 battery
- Tough, aesthetic, brilliant white GRP housing
- Provides clear voice message at 90dB output in alarm, with volume control
- Optional plug-in relay for connection to remote equipment (contacts rated at 1A 24v dc)
- May be remotely powered using an optional 6V power supply (part CSA-SMPSU)

Message: " This is a no Smoking area, please extinguish your cigarettes, a member of staff has been contacted"

## Coverage

The flame detector has a field of view of 120°. The table below provides a guide to the coverage area for a given installed height.

Height Metres (x)	Coverage Metres (y)	Height Feet (x)	Coverage Feet (y)
1	3.5	3	10
2	7	6	20
3	10	9	31
4	14	12	42
5	17	15	52
6	21	18	62

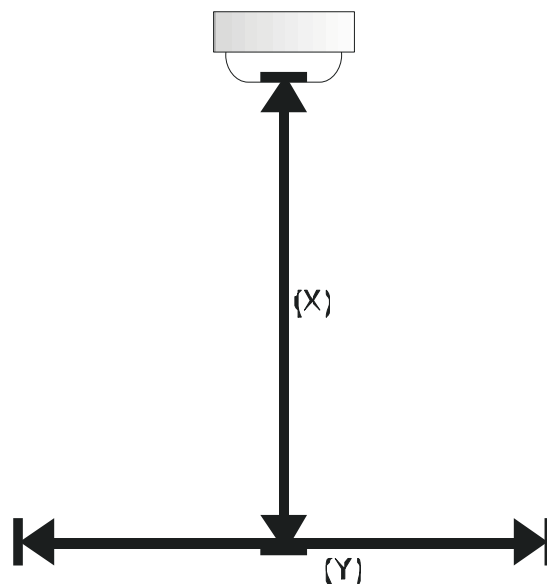

Allied Fire Alarms & Escapes Co Ltd  
Allied House  
Bryn Lane  
Wrexham Industrial Estate  
Wrexham LL13 9UT  
North Wales UK

Web: [www.cfaefire.com](http://www.cfaefire.com)

Phone: +44 (0)1978 661874

Fax: +44 (0)1978 661816

Email: [sales@cfaefire.com](mailto:sales@cfaefire.com)

Issue Date: December 2006

**Plan For**



**The Ban**